

Datasheet

# 2.5" SATA SSD

## 3TG6-P series

- 2.5" SATA III solution for industrial field
- High IOPS
- iSMART disk health monitoring
- End to end data path protection
- iData Guard for abnormal power failure
- iCell technology for data protection (optional)
- iPower Guard for protecting unstable start up and shut down



### Introduction

Innodisk 2.5" SATA SSD 3TG6-P is SATA III 6Gb/s solid state disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 3TG6-P 2.5" SSD not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

# 2.5" SATA SSD

## 3TG6-P series


**Contact us for more information  
about the 2.5" SATA SSD 3TG6-P**

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

### Drawing

\* DGS25-XXXM71XXXXF (128GB-2TB/single board)

\* DGS25-XXXM71XXXQF (4TB) Dual Board

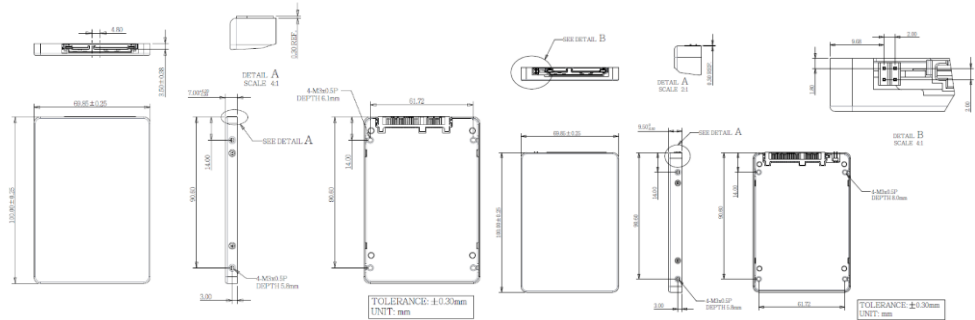

## Specifications

### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City,  
Taiwan (R.O.C.)  
Tel: +886-2-77033000  
Email: sales@innodisk.com

### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-40-3045-400  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2021Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

Interface	SATA III
Flash Type	3D TLC
Capacity	128GB~4TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	560 / 510 MB/s
4KB Random (QD32) R/W (IOPS)*	82000 / 68000
Max. Power Consumption	5.9 W
Thermal Sensor	✓
External DRAM Buffer	✓
AES encryption	✓
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	69.8 X 100.0 X 7.0 mm <sup>3</sup> (128GB ~ 4TB, Single Board) 69.8 X 100.0 X 9.5 mm <sup>3</sup> (4TB/8TB, Dual Board)
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -40°C ~ +85°C MTBF: 3 million hours
* Sequential performance based on CystalDiskMark 6.0.2 with file size 1000MB of Queue Depth 32	

## Ordering Information (Please refer to TPS for detail)

Operation Temp.	128GB	256GB	512GB	1TB	2TB	4TB
Standard Grade (0°C ~ +70°C)	DGS25- A28M71%C*&F(P)	DGS25- B56M71%C*&F(P)	DGS25- C12M71%C*QF(P)	DGS25- 01TM71%C*QF(P)	DGS25- 02TM71%CAQF(P)	DGS25- 04TM71%CAQF(P)
Industrial Grade (-40°C ~ +85°C)	DGS25- A28M71%W*&F(P)	DGS25- B56M71%W*&F(P)	DGS25- C12M71%W*QF(P)	DGS25- 01TM71%W*QF(P)	DGS25- 02TM71%WAQF(P)	DGS25- 04TM71%WAQF(P)

%. E: 64 layers 3D TLC; G: 96 layers 3D TLC; K: 112 layers 3D TLC

\*, 1~9/A~Z: PCB version control

&. S=Single channel; D=Dual channel; Q=4 channel

**innodisk**

[www.innodisk.com](http://www.innodisk.com)