


Datasheet

# SATADOM-SL 3ME3 V2 series

- Built-in Pin 8 power supply
- Best boot drive solution for server and embedded system
- SATA 6Gb/s interface
- High IOPS to reduce boot up timing
- DRAM-less, 100% data integrity
- Innovative Firmware Algorithm
- Anti-vibration mechanical design
- Built in iData Guard



## Introduction

Innodisk Serial ATA Disk on Module (SATADOM) supports SATA III standard (6.0Gb/s) interface with excellent performance, and SATADOM-SL 3ME V2 is designed as the smallest form factor size that could enhance compatibility with various design applications.

The innovative Pin8 uses the SATA connector itself as a power supply to drive the device without external cables. It could be connected directly to the SATA on-board socket on customers' system without additional power cable. Besides, the booting time for operation and the power consumption is less than hard disk drive (HDD), and can work under harsh environment compile with ATA protocol, no additional drives are required, and the SSD can be configured as a boot device or data storage device.

# SATADOM-SL

## 3ME3 V2 series

Contact us for more  
information about the  
SATADOM-SL 3ME3 V2.

Innodisk is a service-driven  
provider of industrial embedded  
flash storage products and  
technologies, with a focus on the  
cloud computing,  
industrial/embedded, and  
aerospace and defense industries.

### Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City,  
Taiwan (R.O.C.)  
Tel: +886-2-7703-3000  
Email: sales@innodisk.com


### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-(0)40-282-1818  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2015 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

202404

### Diagram

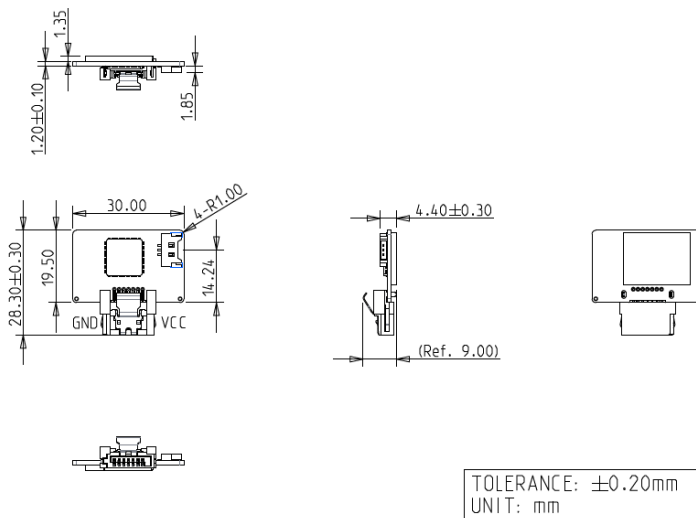

### Specifications

Interface	SATA III
Flash Type	MLC
Capacity	8GB~128GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	200 / 80
Max. Power Consumption	1.8W
Thermal Sensor	WT only
External DRAM buffer	-
H/W Write Protect	-
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	30 X 28.4 X 7.4 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

### Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB
Standard Grade (0°C ~ +70°C)	DESSL-08GD09*C1SCA	DESSL-16GD09*C1SCA	DESSL-32GD09*C1SCA	DESSL-64GD09*CADCDA	DESSL-A28D09*CADCDA
	DESSL-08GD09*C1SCB	DESSL-16GD09*C1SCB	DESSL-32GD09*C1SCB	DESSL-64GD09*CADCB	DESSL-A28D09*CADCB
Industrial Grade (-40°C ~ +85°C)	DESSL-08GD09*W1SCA	DESSL-16GD09*W1SCA	DESSL-32GD09*W1SCA	DESSL-64GD09*WADCA	DESSL-A28D09*WADCA
	DESSL-08GD09*W1SCB	DESSL-16GD09*W1SCB	DESSL-32GD09*W1SCB	DESSL-64GD09*WADCB	DESSL-A28D09*WADCB

\* S: Toshiba A19nm MLC/ B: Toshiba 15nm MLC  
PN end with A: Pin8+ power cable / B: Pin8+ Pin 7



[www.innodisk.com](http://www.innodisk.com)