


**Features**

- Supports dual isolated GbE LAN ports
- Two independent PSE channels
- Supports 12V~24V power input via 4pin header
- Complies with IEEE 802.3af, up to 15.4W at 48V per PoE port.
- Complies with IEC 60950-1:2005 + A1: 2009 + A2:2013 1.7KV HiPOT protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Industrial temperature -40 °C to 85 °C

**Mechanical Drawing**

4pin header power input pin define			
1	2	3	4
NC	GND	GND	12V-24V

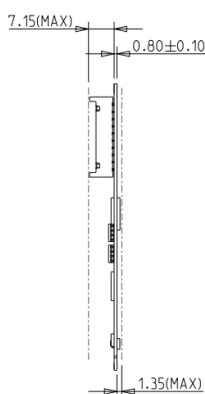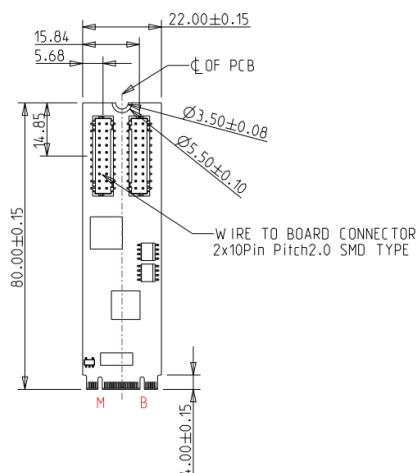

TOLERANCE: ±0.20mm  
UNIT: mm

**Headquarters (Taiwan)**

5F., No.237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City 221,  
Taiwan

Tel: +886-2-7703-3000

Email: sales@innodisk.com

**Branch Offices:****USA**

[usasales@innodisk.com](mailto:usasales@innodisk.com)

+1-510-770-9421

**Europe**

[eusales@innodisk.com](mailto:eusales@innodisk.com)

+31-040-3045-400

**Japan**

[jpsales@innodisk.com](mailto:jpsales@innodisk.com)

+81-3-6667-0161

**China**

[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)

+86-755-2167-3689

[www.innodisk.com](http://www.innodisk.com)

© 2018 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

October 6, 2020

Form-Factor	M.2 2280
Input I/F	PCI Express 2.1 x 1
Output I/F	PoE x 2
Output Connector	RJ45 x 2
TDP	30W
Dimension (WxLxH)	Main Board: 22 x 80 x 9.3 mm Daughter Board: 72.7 x 58.2 x 23.8 mm
Temperature	Operation: STD: 0°C ~ +70°C. W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	Please download driver from MyInnodisk website. Windows: XP(32bit), 7(32/64bit), 8/8.1(32/64 bit), 10(32/64bit) Linux: kernel 2.4 series, 2.6.x and 3.x version.
Limitations	EGPL-G2P1 series does not recommend used in VMware ESXi due to High Latency

**Order information**

**EGPL-G2P1-C1 (Mounting hole, 4pin header, Standard Temp.)**

**EGPL-G2P1-W1 (Mounting hole, 4pin header, Wide Temp.)**





**EGPL-G2P1-C2 (Bracket, 4pin header, Standard Temp.)**

**EGPL-G2P1-W2 (Bracket, 4pin header, Wide Temp.)**




M.2 to dual Isolated PoE Module

[www.innodisk.com](http://www.innodisk.com)


## EGPL-G2P1-C1/W1 Daughter Board and Mechanical Drawing

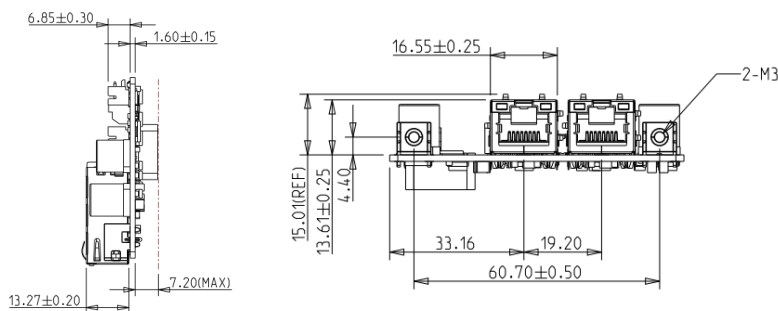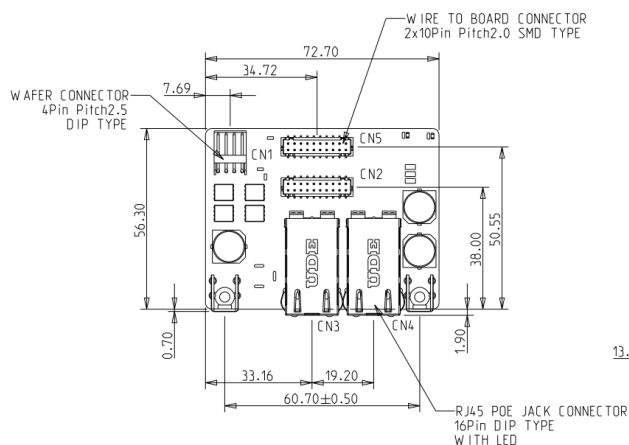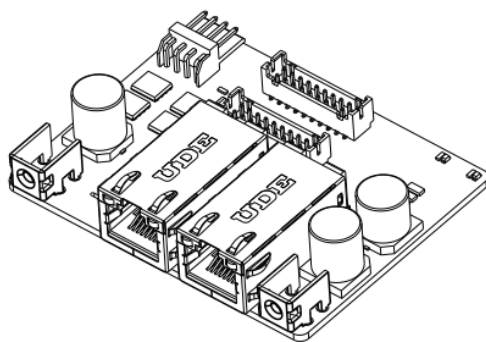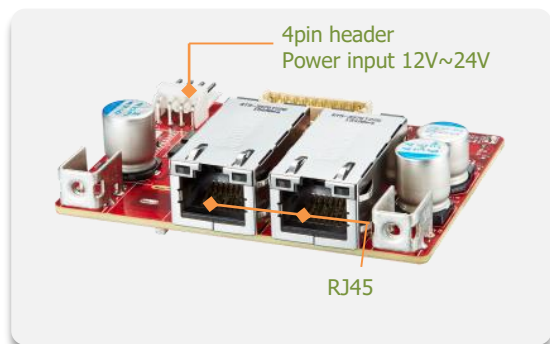

## EGPL-G2P1-C2/W2 Daughter Board and Mechanical Drawing

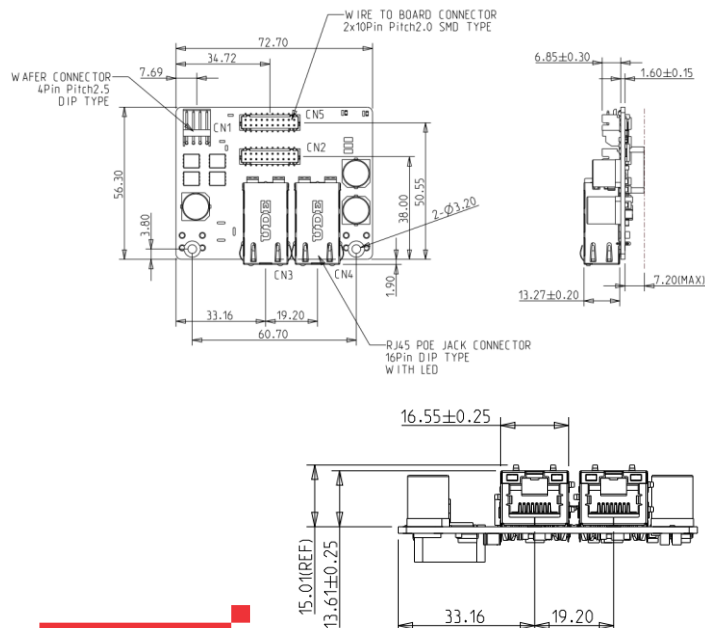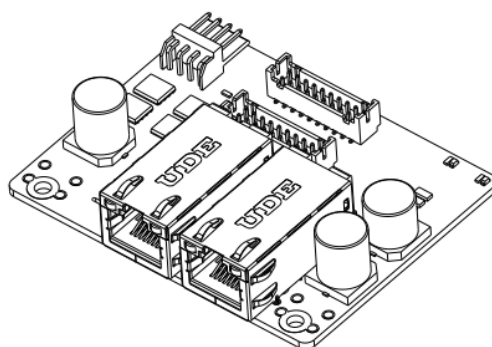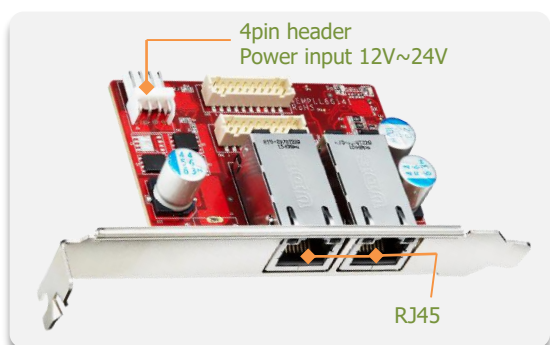

Bracket



TOLERANCE: ±0.20mm

