


EGP2-X201

M.2 2230 to dual x RS232/422/485 module

HIGHLIGHT FEATURES

- PCI-Express specification Rev. 2.0 compliant
- RS-232 / 422 / 485 mode configurable by software
- 4800 to 3Mbps serial data rate (RS-232 921.6Kbps) serial data rate. 16C550 compatible. 256-byte FIFOs
- Alternative vertical or horizontal connector
- Full RS-232 functions with DB9 connector
- Termination resistor enabled / disabled by DIP switch
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV

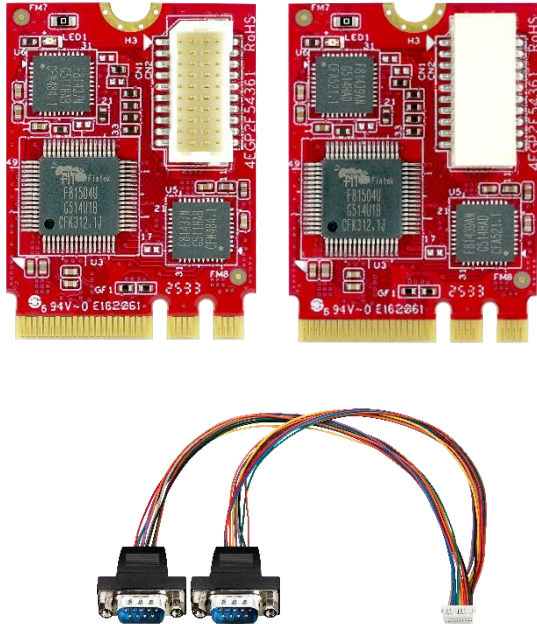

SPECIFICATIONS


Model Name	EGP2-X201
Module Type	M.2 to dual x RS-232 / 422 / 485 Module
Form Factor	M.2 2230 A+E Key
Function	Serial
Input I/F	PCI Express 1.1 x1
Output I/F	RS-232 / RS-422 / RS-485
Output Port	2
Output Connector	DB-9
Max. Power Consumption	0.81W (3.3V x 245.4mA)
Dimension (W x L x H/mm)	Vertical : 22 x 30 x 5.7 Horizontal : 22 x 30 x 6.85
Temperature	Operation : W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	Windows : XP (32 bit), 7 (32 / 64 bit), 8 / 8.1 (32 / 64 bit), 10, and above version, WE7, CE7.0 Linux : Kernel 2.6.x and above
Warranty	3 Years
Notes	--

ORDER INFO.


P/N	Description
EGP2-X201-W1	M.2 to dual x RS232/422/485 module, Vertical Connector/ Wide Temperature
EGP2-X201-W2	M.2 to dual x RS232/422/485 module, Horizontal Connector/ Wide Temperature

MECHANICAL DRAWING

EGP2-X201-W1
(Vertical Connector)

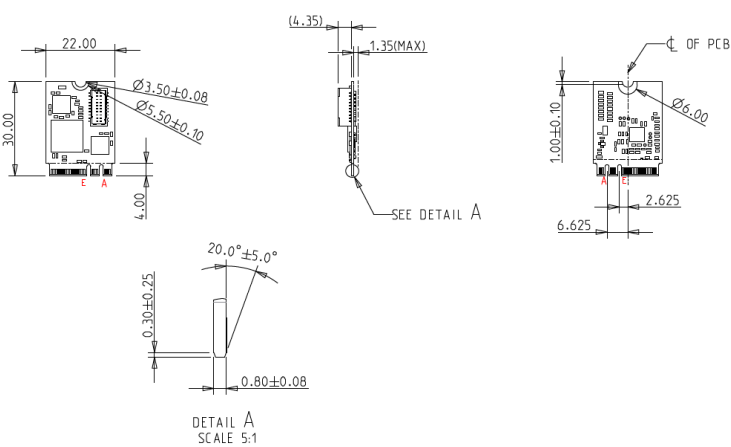

EGP2-X201-W2
(Horizontal Connector)

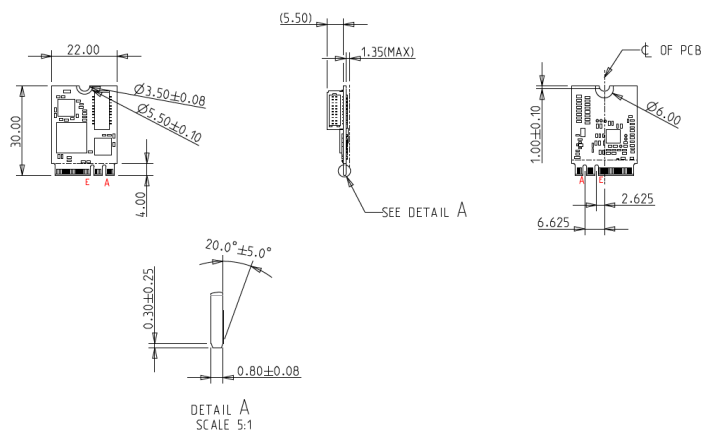

PIN DEFINE

DIP Switch Setting	
OFF	Normal
ON	Termination

DB9 Pin Define			
Pin	RS-232	RS-422 RS-485	RS-485
		Full Duplex	Half Duplex
1	DCD	TX-	D-
2	RX	TX+	D+
3	TX	RX+	
4	DTR	RX-	
5	GND	GND	GND
6	DSR		
7	RTS		
8	CTS		
9	RI		

