

EGPC-B1S1

M.2 to Single Isolated CAN Bus 2.0B / J1939 / CANopen

HIGHLIGHT FEATURES

- Baud rate up to 10 / 20 / 50 / 100 / 250 / 500 / 800 / 1000K
- SAE J1939 / CANopen high layer protocol (Optional)
- Meets the Requirements of the ISO 11898-1
- Compliant with IEC 60950-1 : 2005 + A1 : 2009 + A2 : 2013
2.5kV HiPOT protection
- Compliant with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Supports CAN message acceptance filter
- Supports Linux SocketCAN
- Termination resistor enabled / disabled by switch




SPECIFICATIONS

Model Name	EGPC-B1S1
Module Type	M.2 to Single Isolated CAN Bus 2.0B / J1939 / CANopen Module
Form Factor	M.2 2242 B+M Key
Function	CAN Bus
Input I/F	PCI Express 1.1 x1
Output I/F	CAN Bus 2.0B
Output Port	1
Output Connector	DB-9
Max. Power Consumption	2.5W (3.3V, 742mA)
Dimension (W x L x H/mm)	22 x 42 x 4.8
Temperature	Operation : W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7~2000Hz]
Shock	50G@0.5ms
OS Support	Windows : 7 (32 / 64bit), 8 / 8.1 (32 / 64bit), 10 (32 / 64bit), and above version Linux : SocketCAN driver from Kernel 2.6.38 and above (32 / 64bit)
Warranty	3 Years
Notes	--

ORDER INFO.

P/N	Description
EGPC-B1S1-W1	M.2 2242 to Single Isolated CAN Bus 2.0B Module
EGPC-B1S1-W2	M.2 2242 to Single Isolated J1939 / CANopen Module


MECHANICAL DRAWING

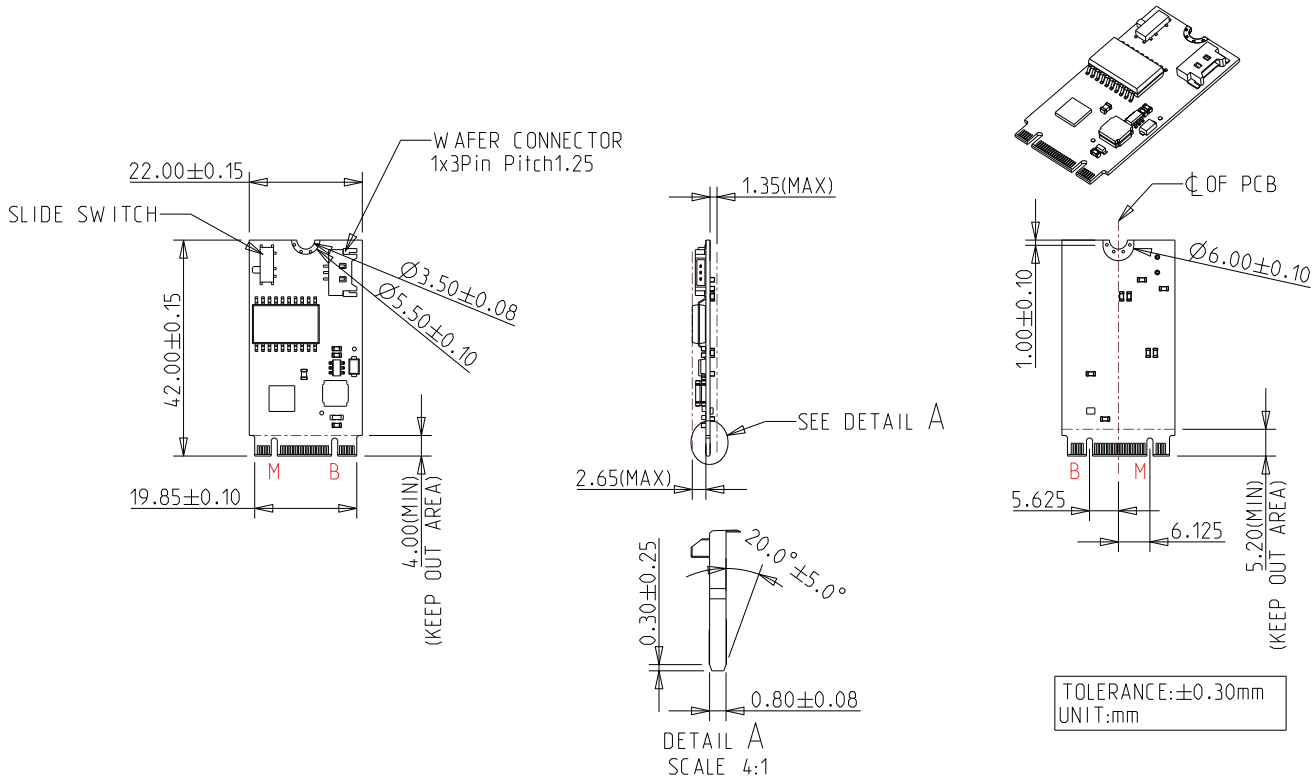

PIN DEFINE

CAN DB9 Connector Pin Define	
1	NC
2	CAN-L
3	GND
4	NC
5	NC
6	NC
7	CAN-H
8	NC
9	NC

3Pin CAN Connector Pin Define	
1	CAN-L
2	CAN-H
3	GND

Side Switch (Termination Resistor)		
1	Enable	
2	Disable	