

USB 2.0 2MP Fixed Focus
Camera Module

EV2U-LOM2-GSCF

User Manual

Customer :

Customer Part Number :

Innodisk Part Number :

Innodisk Model Name :

Date :

Innodisk Approver

Customer Approver

Contents

1. Product Introduction	
1.1 Overview	4
1.2 Block Diagram	4
1.3 Product List	4
1.4 Product Picture	5
2. Product Specification	
2.1 Product Parameter	6
2.2 Resolution Information	7
2.3 Lens Specification	8
2.4 Electrical Specification	9
2.5 Environmental Specification	9
2.6 Mean Time Between Failure (MTBF)	9
3. Hardware Information	
3.1 Connector	10
3.2 Product Drawing	10
4. Packing List	12
5. Installation Guide	13
6. Declaration And Certification	14

Revision History

Revision	Description	Date
1.0	First Released	Jul, 2026

1.1. Overview

Innodisk’s 2MP Global Shutter camera module offers a maximum resolution of 2MP at 60fps and utilizes a USB 2.0 interface. Featuring global shutter design, the module exposes all pixels simultaneously, eliminating motion artifacts and rolling shutter distortion during high-speed image capture. This camera module is suitable for automation, high-speed inspection, and robotics applications where precise synchronization and accurate tracking of moving objects are paramount.

1.2 Block Diagram

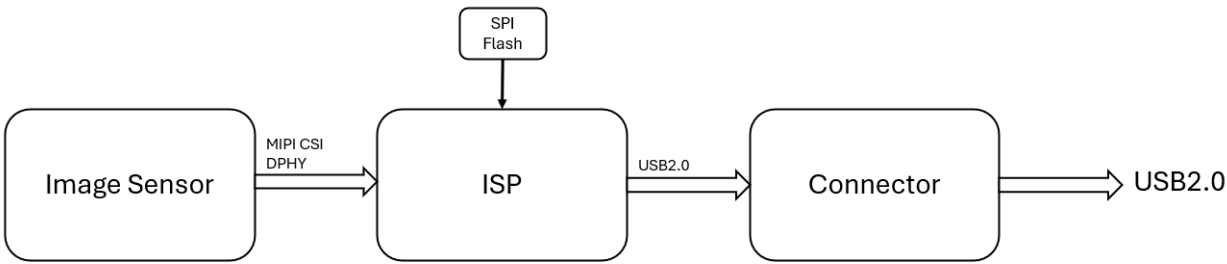


Figure 1: Block Diagram

1.3 Product List

P/N	Description
EV2U-LOM2-GSCF-11	USB 2.0 2MP Fixed Focus Camera Module (USB Cable Included) Dimension: 38 x 38mm
EV2U-LOM2-GSCF-12	USB 2.0 2MP Fixed Focus Camera Module, with DMIC (USB cable included) Dimension : 38 x 38mm
EV2U-LOM2-GSCF-A1	USB 2.0 2MP Fixed Focus Camera Module (USB Cable Included) Dimension: 32 x 32mm
EV2U-LOM2-GSCF-A2	USB 2.0 2MP Fixed Focus Camera Module, with DMIC (USB cable included) Dimension : 32 x 32mm
EV2U-LOM2-GSCF-21	USB 2.0 2MP Fixed Focus Camera Module, with Housing (USB cable included) Dimension : 41.4 x 41.4mm
7W2000000160	USB 2.0 cable 1 meter, 5 pins, pitch 1mm

Table 1: Product List

1.4 Product Picture

EV2U-LOM2-GSCF

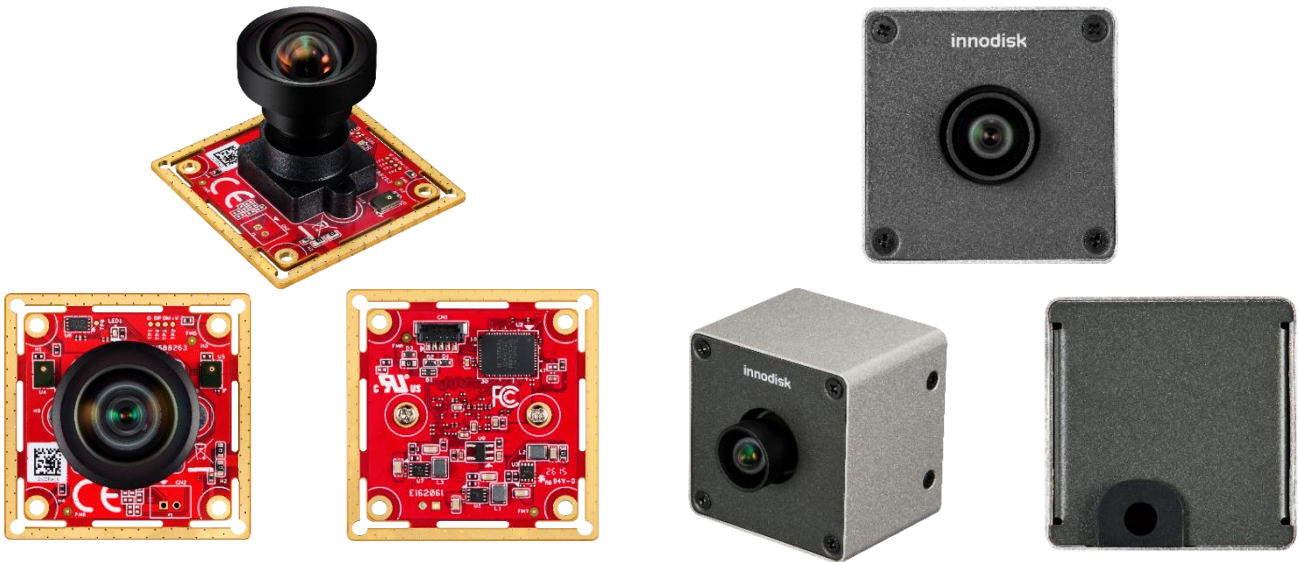


Figure 2: Product Picture



Figure 3: Cable Picture

2. Product Specification

EV2U-LOM2-GSCF

2.1. Product Parameter

Model Name	EV2U-LOM2-GSCF
Module Type	USB 2.0 2MP Fixed Focus Camera Module
Resolution (Max.)	2MP
Frame Rate (Max. Resolution)	60fps
Output I/F	USB 2.0
Sensor	onsemi AR0234
Shutter	Global
Video Format	YUV422, MJPEG
Power Consumption	Approximate 0.6W (MJPEG @Max. Resolution)
Operating Temperature	0°C ~ 70°C
Sensor Size	1/2.6"
Pixel Size	3.0μm
Chroma Type	Color
Lens Type	Fixed Focus (M12)
Dimension (W x L x H/mm)	38 x 38 x 35 41.4 x 41.4 x 51.7 (Housing)
Lens FOV (D/H/V)	97°/87°/61°
Platform Support	Windows / Linux / Android / macOS
Housing	Board Level, Housing
Features	-
Dynamic Range	N/A
Warranty	2 Years
Module Weight	47.42g 83.30g (Housing)

Table 2: Product Parameter

2.2 Resolution Information

Resolution	YUV422	MJPEG
1920*1080	5 fps	60 / 50 / 30 / 25 / 20 / 15 / 10 / 5 fps
1280*720	10 / 5 fps	120 / 100 / 60 / 50 / 30 / 25 / 20 / 15 / 10 / 5 fps
640*480	30 / 25 / 20 / 15 / 10 / 5 fps	120 / 100 / 60 / 50 / 30 / 25 / 20 / 15 / 10 / 5 fps

Table 3: Resolution Matrix

2.3 Lens Specification

Items	Specification
F No.	2.0 ± 5%
Focal Length	3.05 ± 5%
Optical Back Focal Length	4.85 ± 0.2mm (in air)
Mechanical Back Focal Length	3.64 ± 0.2mm (in air)
TTL (Total Track Length)	29.56 ± 0.3mm (in air)
Image Circle	Φ9.65 (MAX)
Mount	M12*P0.50
Diagonal FOV (D)	97°
Horizontal FOV (H)	87°
Vertical FOV (V)	61°

Table 4: Lens Specification

2.4 Electrical Specifications

Item	Value	Unit
Input Voltage	5	V
Current @Idle	25	mA
Current @Average	125	mA
Current @Maximum	227	mA
Idle Power Rating	0.125	W
Average Power Rating	0.625	W
Maximum Power Rating	1.135	W

Table 5: Power Consumption

2.5 Operating Temperature Range

Temperature	Range
Operation	0°C ~ +70°C
Storage	-40°C ~ +85°C

Table 6: Operating Temperature Range

2.6 Mean Time between Failure (MTBF)

Reliability prediction methodology provides the basis for reliability evaluation and analysis. The purpose of the prediction is to predict the life time of the product in units of failure rate and MTBF.

Product	Condition	MTBF (Hours)
EV2U-LOM2-GSCF	The analysis is at 25°C ambient temperature by Telcordia SR-332, Issues 4, Method I, Case 3 under Ground Benign, Controlled environment, 50% operation stress	26,430,174

Table 7: Mean Time between Failure (MTBF)

3. Hardware Information

EV2U-LOM2-GSCF

3.1 Connector

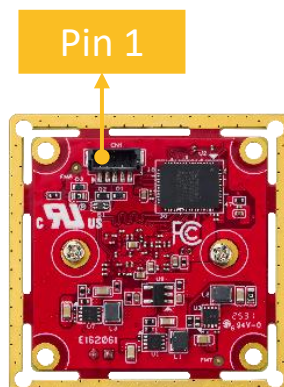


Figure 4: Connector Picture

3.2 Product Drawing

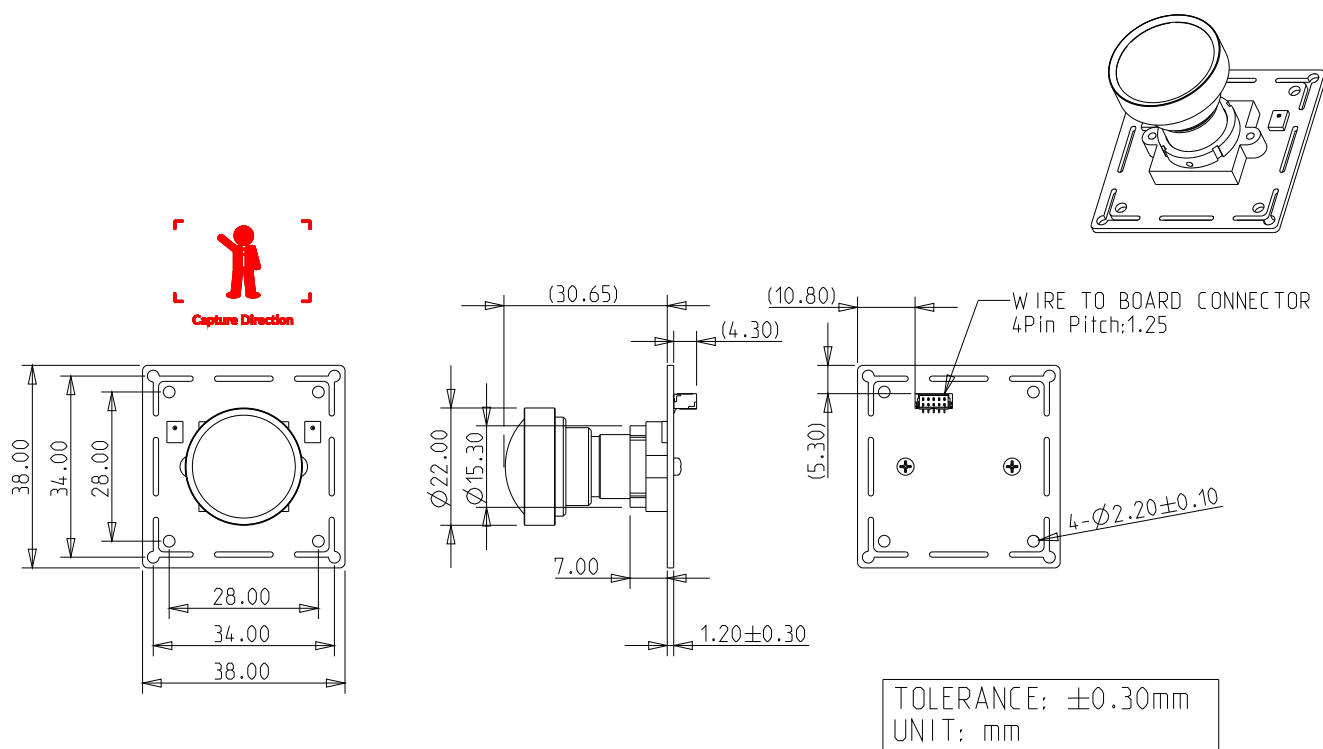


Figure 5: Product Drawing

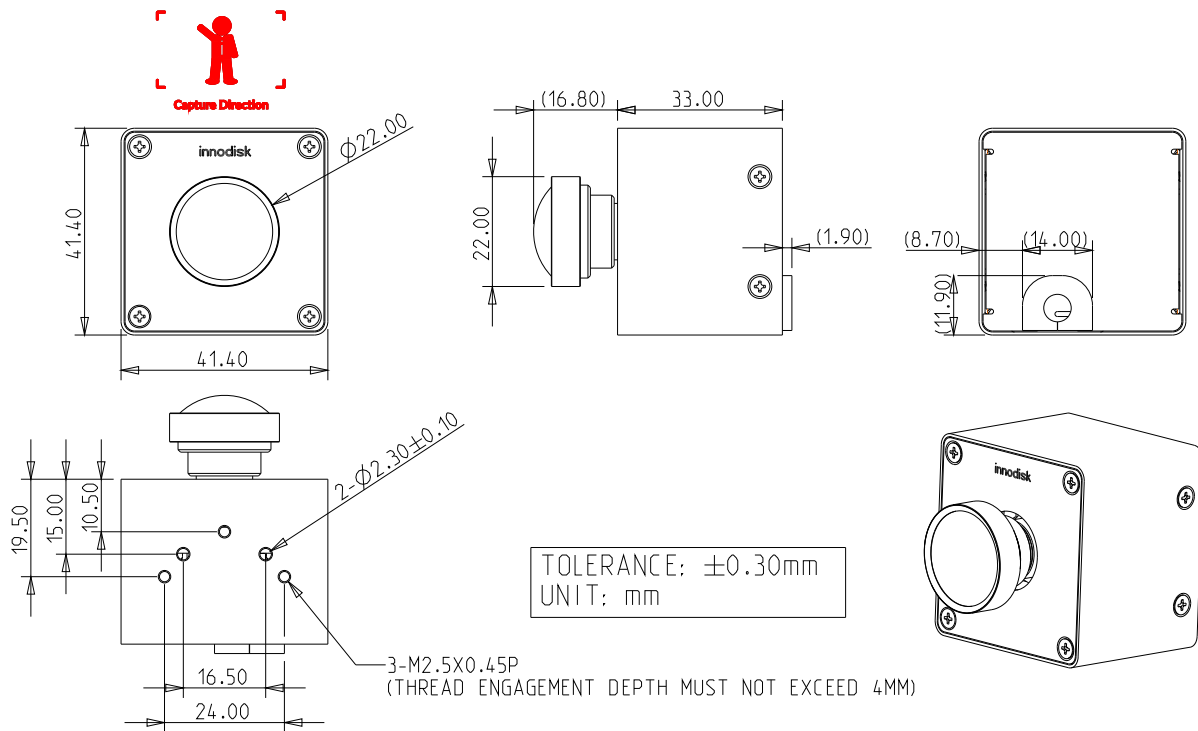


Figure 6: Housing Product Drawing

4. Packing List

EV2U-LOM2-GSCF

P/N	Description	Qty.
EV2U-LOM2-GSCF	USB 2.0 2MP Fixed Focus Camera Module	1
7W2000000160	USB 2.0 cable 1 meter, 5 pins, pitch 1mm	1

Table 8: Packing List

5. Installation Guide

EV2U-LOM2-GSCF

Connect the Camera using the USB 2.0 cable as shown below:


The USB 2.0 interface supports plug-and-play, so there is no need to power off the system before connecting the camera.

Connect one end of the USB 2.0 cable to the camera module.

Connect the other end of the cable to the USB port on the host system.

Once connected, verify that the camera is properly recognized by the system.

Make sure the cable is securely connected and not loose.

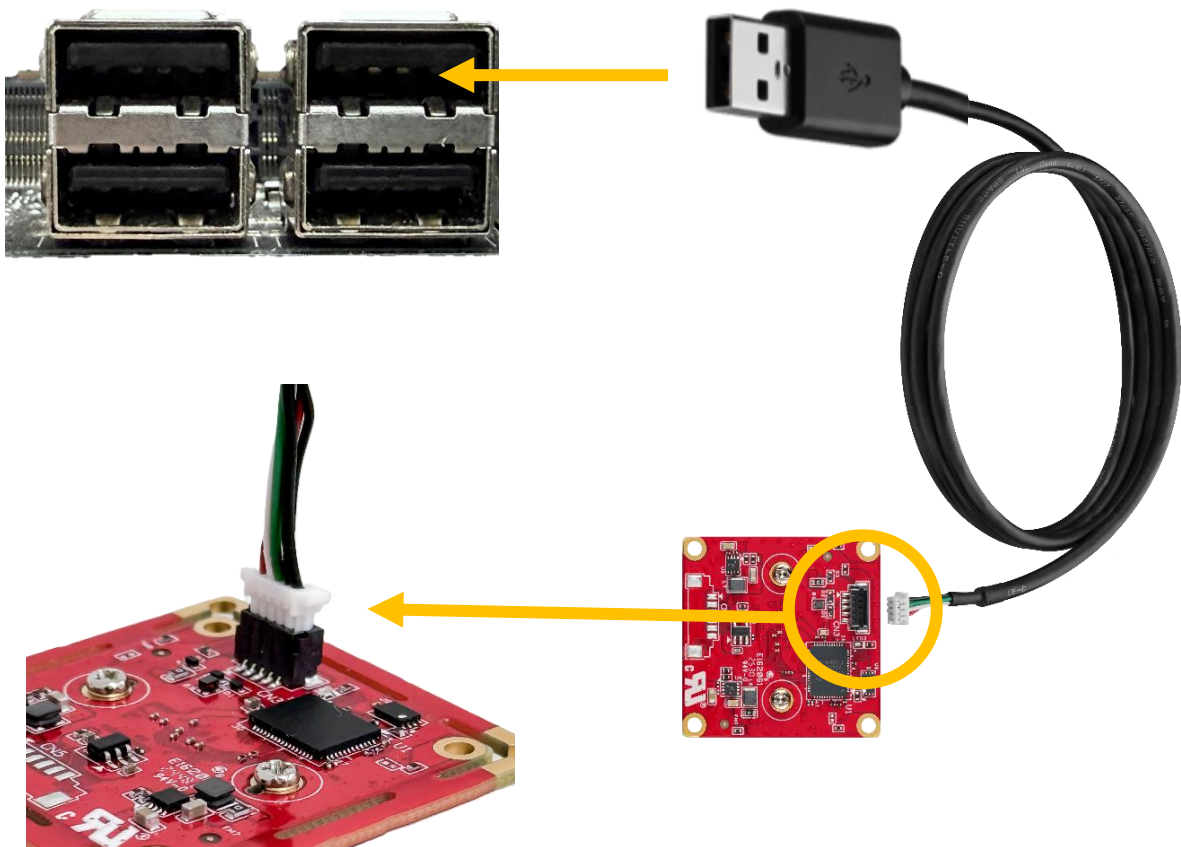

6. Declaration And Certification

EV2U-LOM2-GSCF

innodisk

宜鼎國際股份有限公司 Innodisk Corporation REACH Declaration

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <https://www.innodisk.com/>

Innodisk Corporation pursues its social responsibility for global environmental preservation by committing to be compliant with REACH regulation (REGULATION (EC) No 1907/2006). We hereby confirm that the product(s),

Scope: Flash Memory, DRAM Module and Embedded Peripherals Products.

(Standard finished products, excluding all of customized products & EOL products.)

- The standard products of **not listed in the Appendix2** meet the requirements of REACH SVHC regulations (SVHCs < 0.1% in Article), as described in the candidate list table currently including 247 substances (release date: 21-JAN-2025) and shown on the ECHA website. <https://echa.europa.eu/candidate-list-table>
- The standard products listed in the **Appendix2** contain(s) one or more hazardous substances or constituents exceeding 0.1 % by weight in article if not otherwise specified in candidate list table.
Where the threshold value is exceeded, the substances in question are to be declared in accompanying. (SVHCs > 0.1% in Article).
- Comply with REACH Annex XVII.

Guarantor

Company name 公司名稱: Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人:  Yichuan Chen 陳怡全

Company Representative Title 公司代表人職稱: Quality Assurance Div. SR. Manager 品保處經理

Date 日期: 2025 / 02 / 24



RoHS 自我宣告書 (RoHS Declaration of Conformity)

Manufacturer Products: All Innodisk Flash Memory, DRAM Module and Embedded Peripherals

- 一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 及 (EU) 2015/863 關於 RoHS 之規範要求。
Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) and (EU) 2015/863 requirement.
- 二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。
Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.
- 三、 本公司聲明我們的產品符合 RoHS 指令的附件中 7(a)、7(c)-I、6(c) 允許豁免。
We declare, our products permitted by the following exemptions specified in the Annex of the RoHS directive.
- ※ 7(a) Lead in high melting temperature type solders (i.e. lead-based alloys containing 85% by weight or more lead).
 - ※ 7(c)-I Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectric devices, or in a glass or ceramic matrix compound.
 - ※ 6(c) Copper alloy containing up to 4% lead by weight. (This exemption applies to products that use antennas)

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBs)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm
鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm
鄰苯二甲酸丁酯苯甲酯 (BBP)	< 1000 ppm
鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm
鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm

innodisk

宜鼎國際股份有限公司

Page 2/2

Innodisk Corporation

Guarantor



Company name 公司名稱： Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人： Yichuan Chen 陳怡全

Company Representative Title 公司代表人職稱： Quality Assurance Div. SR. Manager 品保處經理

Date 日期： 2025 / 02 / 24

CE EMC Test Report

Issued date: Sep. 30, 2025

Project No.: 25Q091202

Product : USB 2.0 2MP Fixed Focus Camera Module**Model :** EV2U-LOM2-GSCF**Applicant :** Innodisk Corporation**Address :** 5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221006,
Taiwan (R.O.C.)**Report No: WD-EE-R-250288-A0**

According to

EN 55032: 2015 + A11: 2020, Class A

BS EN 55032: 2015 + A11: 2020

CISPR 32: 2015 + COR1: 2016

EN 55032: 2015 + A1: 2020, [Class A](#)

BS EN 55032: 2015 + A1: 2020

CISPR 32: 2015 + A1: 2020

EN 61000-3-2: 2014

EN IEC 61000-3-2: 2019 + A1: 2021

EN 61000-3-3: 2013 + A2: 2021

BS EN 61000-3-2: 2014

BS EN IEC 61000-3-2: 2019 + A1: 2021

BS EN 61000-3-3: 2013 + A2: 2021

EN 55035: 2017 + A11: 2020

BS EN 55035: 2017 + A11: 2020

IEC 61000-4-2: 2008

IEC 61000-4-3: 2020

IEC 61000-4-4: 2012

IEC 61000-4-5: 2014 + A1: 2017

IEC 61000-4-6: 2023

IEC 61000-4-8: 2009

IEC 61000-4-11: 2020 + COR2: 2022

Authorized Signatory :  / Ken Huang

Wendell Industrial Co., Ltd
Wendell EMC & RF Laboratory

Add: 5F-1, No. 188, Baoqiao Road, Xindian District, New Taipei City 23145, Taiwan R.O.C.





FCC SDoC Test Report

Issued date: Sep. 30, 2025

Project No.: 25Q091202

Product : USB 2.0 2MP Fixed Focus Camera Module

Model : EV2U-LOM2-GSCF

Applicant : Innodisk Corporation

Address : 5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221005,
Taiwan (R.O.C.)

Report No: WD-EF-R-250288-A0

According to

47 CFR FCC Part 15, Subpart B, Class A

ANSI C63.4: 2014
ANSI C63.4: 2017

Authorized Signatory :

/ Ken Huang

Wendell Industrial Co., Ltd

Wendell EMC & RF Laboratory

Add: 5F-1, No. 188, Baoqiao Road, Xindian District, New Taipei City 23145, Taiwan R.O.C.

