



EGPL-21S2

M.2 2242 to Single Isolated 2.5GbE LAN Module

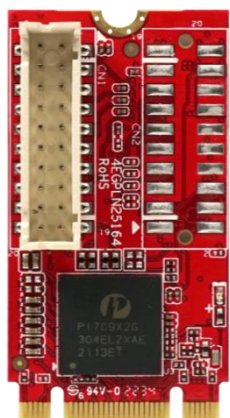

HIGHLIGHT FEATURES

- intel i226 controller
- Single isolated 2.5GbE LAN ports
- Complies with IEC 60950-1 : 2005 + A1 : 2009 + A2 : 2013 2kV HiPOT protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Flexible daughter board with cable to fit into different system
- Industrial temperature -40°C to 85°C

SPECIFICATIONS


Model Name	EGPL-21S2
Module Type	M.2 2242 to Single Isolated 2.5GbE LAN Module
Form Factor	M.2 2242 B+M Key
Function	LAN
Input I/F	PCI Express 2.1 x2
Output I/F	2.5GbE LAN
Output Port	1
Output Connector	RJ45
Max. Power Consumption	1.989W (3.3V, 603mA)
Dimension (W x L x H/mm)	Main Board : 22 x 42 x 9.01 Daughter Board : 50 x 28 x 19.37
Temperature	Operation : S/T 0°C ~ 70°C ; W/T -40°C ~ 85°C (Ta) Storage : -55°C ~ 95°C (Ta)
Vibration	5G@[7 ~ 2000Hz]
Shock	50G@0.5ms
OS Support	Windows : 10 (64bit), and above version Linux (igc) : Kernel 5.16.18
Warranty	3 Years
Notes	<ul style="list-style-type: none"> • Please download Windows driver from Intel official website. • Linux upstream kernel release from 5.16.18 (inbox igc driver) • Not recommend used in VMware ESXi due to High Latency. • Not support Intel vPro.

ORDER INFO.


P/N	Description
EGPL-21S2-C1	M.2 2242 to Single Isolated 2.5Gbe LAN Module, Mounting Hole / Standard Temperature
EGPL-21S2-W1	M.2 2242 to Single Isolated 2.5Gbe LAN Module, Mounting Hole / Wide Temperature

MECHANICAL DRAWING

Main Board

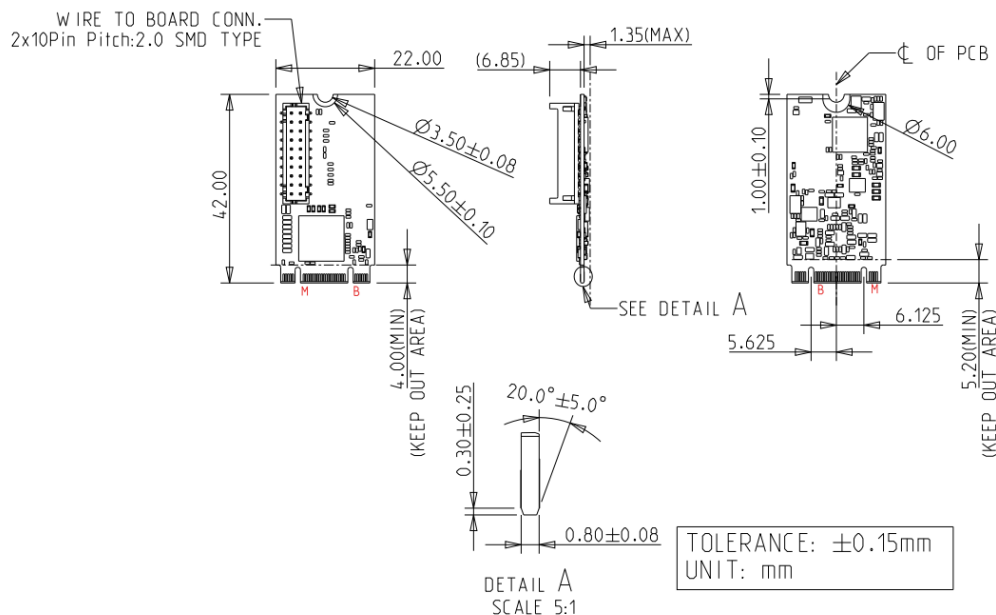

Daughter Board

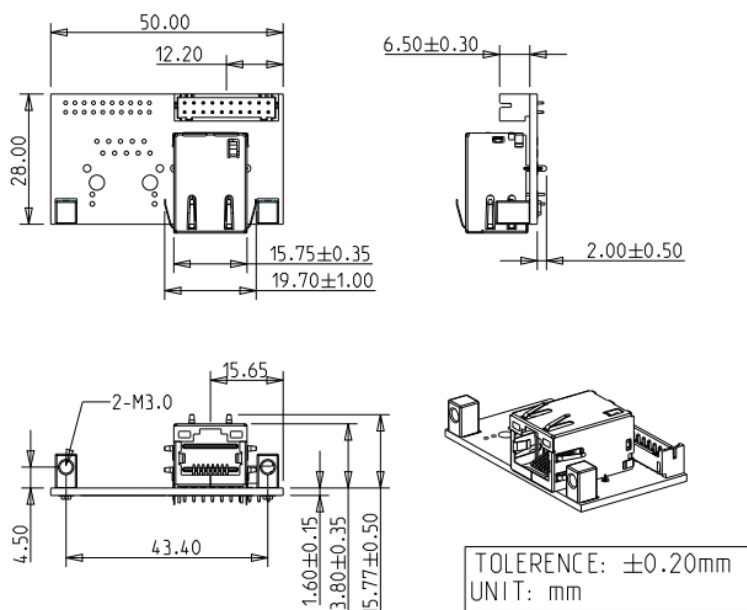

HQ (Taiwan) T +886-2-7703-3000 / E sales@innodisk.com

CN T +86-755-2167-3689 / E sales_cn@innodisk.com

US T +1-510-770-9421 / E usasales@innodisk.com

EU T +31-40-3045-400 / E eusales@innodisk.com

JP T +81-3-6667-0161 / E jp_sales@innodisk.com

innodisk